Outperform every day.™

Project:

Item Number:

Quantity:

INDUCTION RANGE: MIRAGE® PRO COUNTERTOP

Mirage® Pro 59500P Countertop Induction Range

DESCRIPTION

The ultra-low profile, portable countertop induction range is designed for use in light to medium duty front-of-the-house cooking. Models 59500P and 59510P will plug into standard, dedicated 15A outlets which are readily available in most restaurants and kitchens.

The induction range comes complete with a 6-ft. (183 cm) power cord and plug. The case frame is made from heavy-duty, 18-gauge stainless steel with a ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The induction ranges are equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off
- Safety auto-shut-off function

MODELS

59500P 1.8kW @ 120V (US only)
59510P 1.4kW @ 120V (US and Canada)

FEATURES

- Next generation G4 engine with 4 IGBT switches for improved durability and temperature control
- Full two-year parts and labor warranty
- 100 power levels with optimum power output to a wide variety of induction-ready cookware
- 1-100 power levels or °F/°C temperature level controls
- 90% efficiency rating
- Enhanced troubleshooting display
- 1-180 minute timer
- Stainless steel case and ceramic top
- Patent-pending low profile design and complete portability
- 59500P has a variable speed knob for fast temperature adjustment
- Ranges display HOT when unit is turned off, if the cooking surface is still hot
- Rubber feet to prevent slipping of appliance
- Unit comes with cord and plug and does not require hard wiring
- FCC listed

IMPORTANT

- This appliance is intended for use with induction-ready cookware.
- All models require adequate unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 4 inches (10.2 cm) at the rear and 1 inch (2.5 cm) at the bottom.

Agency Listings — 59500P

UL LISTED, NSF, FC — This device complies with Part 18 FCC Rules.

Agency Listings — 59510P

c UL us LISTED, NSF, FC — This device complies with Part 18 FCC Rules.

Due to continued product improvement, please consult www.vollrath.com for current product specifications.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Small-wares Catalog.

Approvals	Date

Induction Range: Mirage® Pro Countertop

The Vollrath Company, L.L.C.

Outperform every day.™
www.vollrath.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

Mission Restaurant Suppy - Webstore

INDUCTION RANGE: MIRAGE® PRO COUNTERTOP

MODELS

59500P 1.8kW @ 120V (US only)
59510P 1.4 kW @ 120V (US and Canada)

DIMENSIONS

Dimensions shown in inches (cm)

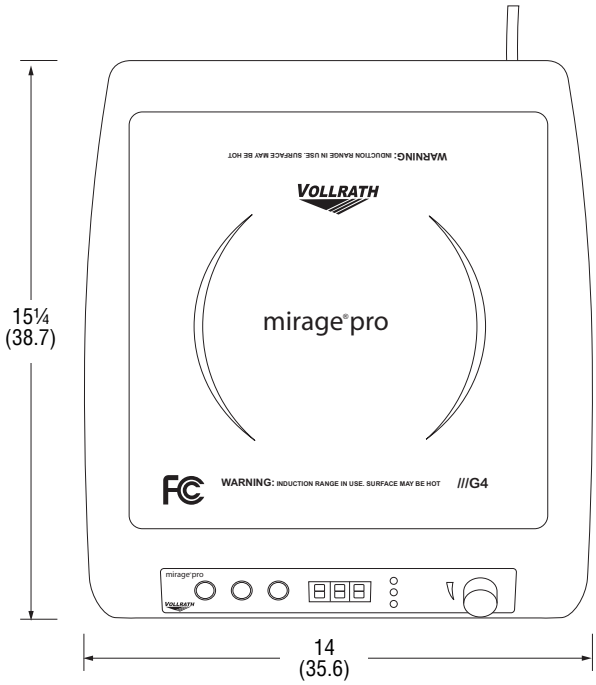

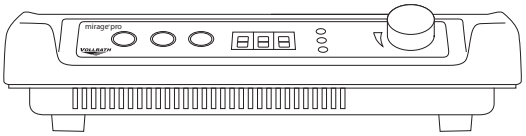



Unit shown with ½" (1.27 cm) feet.

SPECIFICATIONS – 1 PHASE, 60 HZ

Model	Max Pan Size	kW Rating	Volts	Nominal Amps	Plug	Weight	Shipping Weight	Shipping Container
59500P	14 (35.6)	1.8	120V AC	15	NEMA 5-15P	12.8 (5.8)	15.7 (17.1)	17¾ x 17 x 7¼ (45.1 x 43.2 x 18.4)
59510P	14 (35.6)	1.4	120V AC	12	NEMA 5-15P	12.8 (5.8)	15.7 (17.1)	17¾ x 17 x 7¼ (45.1 x 43.2 x 18.4)

Receptacle

120V

NEMA 5-15R

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or

Technical Services: 800.628.0832
Technical Services Fax:
920.459.5462

Outperform every day.™

www.vollrath.com

© 2013 The Vollrath Company L.L.C.

Form Number L35791 6/24/13
Printed in USA

Mission Restaurant Suppy - Webstore