

Chemical Sanitizing Glasswasher



FEATURES:

- 30 racks per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and deliming system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.
- Instant start for simple operation.
- Built-in Hot Water Assurance System guarantees hot water every cycle.
- Pumped drain allows for flexible installations. No floor drain required.
- Wash tank sustainer heater keeps water at proper temperature between loads.



Upper and lower rotating wash arms guarantee excellent results.



"Built in" Hot Water Assurance System provides hot water every cycle.



Uses standard 19-3/4"X 19-3/4" racks. Large 11-1/4" glass clearance.



"Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.

Available Options

Sanitizer Alarm










Chemical Sanitizing Glasswasher

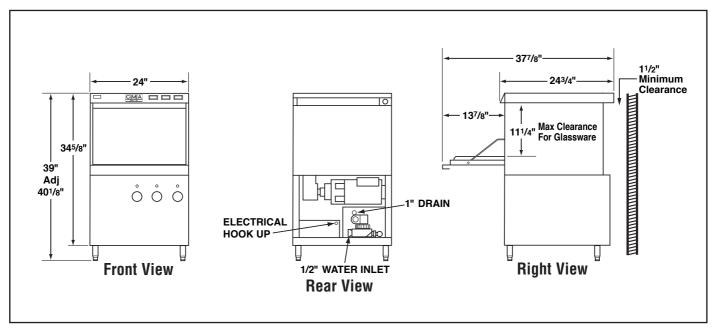

Specifications:

MODEL GL-X	USA	METRIC		USA	METRIC
OPERATING CAPACITY RACKS PER HOUR	30	30	WASH PUMP MOTOR HP	1	1
OPERATING CYCLE WASH TIME-SEC RINSE TIME-SEC DWELL/TIME-SEC TOTAL CYCLE TIME WASH TANK CAPACITY WASH PUMP CAPACITY	58 32 30 120 1.7 GAL. 35 GPM	58 32 30 120 (6.45 L) (132 LPM)	DIMENSIONS DEPTH WIDTH HEIGHT MAXIMUM CLEARANCE FOR GLASSWARE STANDARD DISHRACK DIMENSIONS	24-3/4" 24" 39"-40-1/8" 11-1/4" 1 19-3/4"X19-3/4"	(63cm) (61cm) (99-102cm) (28.57cm) 1 (50X50cm)
MINIMUM TEMPERATURE REQUI WASH TEMP.	неи 120°F	(50°C)	ELECTRICAL RATING	VOLTS	AMPS
WATER CONSUMPTION PER RACK PER HOUR WATER INLET DRAIN	1.7 GAL. 40.8 GPH 1/2" 1"	(6.45 L) (154.4 LPH) (1.27 cm) (2.54cm)	SHIPPING WEIGHT Approximate	244#	16 (110.6kg)

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

Summary Specifications: Model GL-X

The GL-X glasswasher is designed to produce sparkling clean glassware utilizing our unique Hot Water Assurance System. The GL-X is easy to use, fast and efficient, while conserving water, energy and chemicals. Built-in sustainer heater provides continuous 130°F hot water every cycle. The GL-X is constructed entirely of stainless steel and is equipped with an integrated chemical delivery system. The GL-X incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

