Hoshizaki reserves the right to change specifications without notice.

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

KM-101BAH

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

KM-101BAH
1/08
Item # 13209

CUBER DIMENSIONS
W x D x H

KM-101BAH
23 3/4 x 24 x 39*
* with 6" legs

KM-101BAH
Air-Cooled
Shown

- Up to 115 lbs. of ice production per 24 hours
- Up to 56 lbs. of built-in storage capacity
- Individual crescent cube
- Durable stainless steel exterior
- CycleSaver® Design
- EverCheck® alert system
- Front in, front out airflow
- Stainless steel evaporator
- Slide in door
- Removable air filter
- Power switch accessible without panel removal
- Built-in installation possible
- Optional drain pump HS-0190 with HS-0215*
  (*HS-0215 included at no extra charge)
- Complies with California Energy Commission (CEC)
- R-134a Refrigerant

* The KM-101BAH is ENERGY STAR certified.

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.
Five Year - Parts & Labor on: Evaporator.
Five Year - Parts on: Compressor, air-cooled condenser coil.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com

KM-101BAH
SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

DIMENSIONS
W x D x H

KM-101BAH
23 3/4 x 24 x 39*
*with 6" legs

• Air-cooled

AIR-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	115	107	97
	80°	109	97	87
	90°	107	88	78

UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle Lbs.	Cubes	KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
KM-101BAH	2.31	110	9.4	23.0	N/A

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-101BAH	Air-Cooled	5.2	15A	136 lbs.

KM CUBE DIMENSIONS



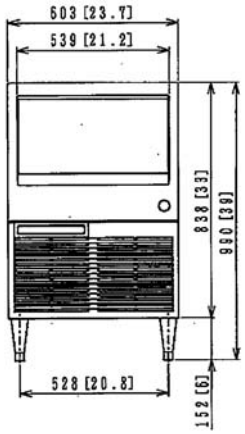

FRONT DIMENSIONS

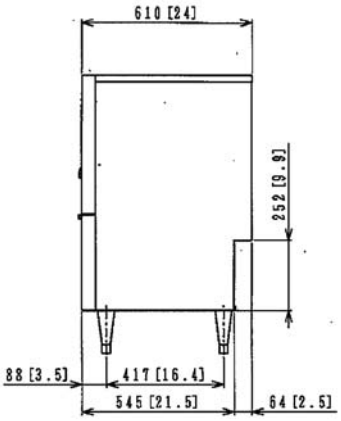

SIDE DIMENSIONS

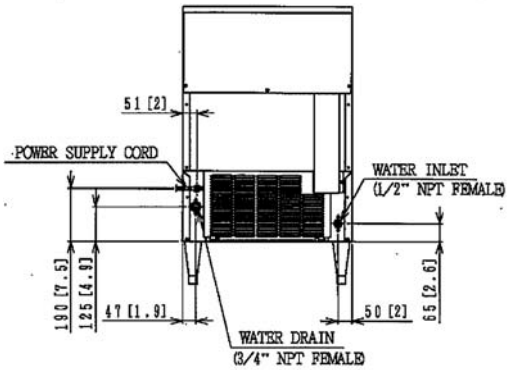

BACK DIMENSIONS

ELECTRICAL & PLUMBING/KM-101BAH

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" independent drain connection
- 1/2" FPT Water Inlet

OPERATING LIMITS

• Ambient Temp Range	45 - 100°F
• Water Temp Range	45 - 90°F
• Water Pressure	10 - 113psig
• Voltage Range	104 - 127V

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com | Printed in U.S.A.