

TRUE FOOD SERVICE EQUIPMENT, INC.

 St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
 (636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

DT-Series - Dual Temperature Reach-In Refrigerator/Freezer


T-49DT

TRUE has been rated the #1 brand in America.

Solid Door, Dual Temperature Reach-In Refrigerator/Freezer

 T-23DT, T-49DT, T-49DT-4

SPECIFICATIONS / FEATURES

DOORS:

- 300 series stainless steel exterior with white aluminum interior to match cabinet liner. Doors extend full width of cabinet shell. Door gaskets of one piece construction.
- Lifetime guaranteed adjustable torsion type closure system with aluminum block supports. The face of each door fitted with a 12" long recessed handle with sheetmetal interlock. Handles are foamed-in-place to insure permanent attachment.

INSULATION:

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- Adjustable vinyl coated wire shelves (3 per section). Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

LIGHTING:

- Compartmentalized, incandescent interior lighting. Lights activated by rocker switch mounted above door(s).

REFRIGERATION SYSTEM:

- Two independent, self-contained refrigeration systems CFC free environmentally friendly and factory balanced. 134A refrigerator refrigerant - R404A freezer refrigerant.
- Bottom mounted condensing units - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F (refrigerator) and -10°F (freezer) interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection. A cord and plug set to be included.
- A sole use circuit is required.

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- 300 series stainless steel front grill, shroud and doors. Anodized quality aluminum exterior ends and back.
- NSF approved, white vinyl coated aluminum and 300 series stainless floor with coved corners.
- Barrel locks standard. Locks keyed alike. Digital exterior mounted temperature monitors for both refrigerator and freezer.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection. Frame rail fitted with 4" diameter castors, front castors include brakes.

Also available:

- *Glass Door Models*


 T-23DT
 115/60/1
 NEMA 5-15R

 T-49DT & T-49DT-4
 115/60/1
 NEMA 5-20R

*Remote cabinets available 14% off list
(condensing units supplied by others).*

Consult factory technical service dept. for BTU information.

 Printed in
 U.S.A.

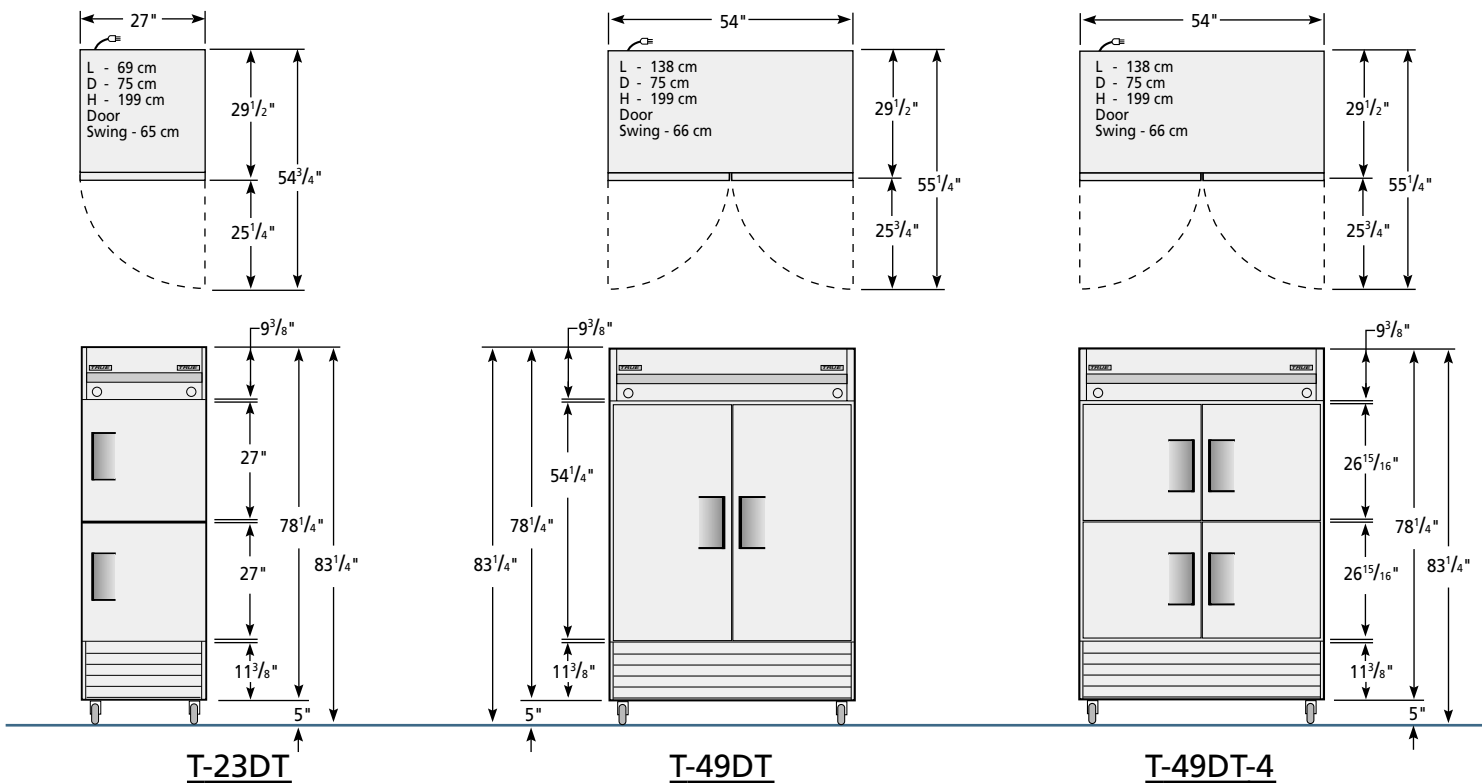

Exceptions:

Specifications subject to change without notice.

APPROVALS:



DT-Series: Solid Door, Dual Temperature Reach-In Refrigerator/Freezer



Rough-In Data															
Model	Swing Doors	Capacity (Cu. Ft)		# of Shelves	Dimensions (inches)			HP		Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
		Ref.	Freezer		L	D	H*	Ref.	Freezer						
T-23DT	2	11	8	3	27	29 1/2	78 1/4	1/5	1/3	115/60/1	1	12.0	5-15	9	318
T-49DT	2	23	23	6	54	29 1/2	78 1/4	1/3	1/2	115/60/1	1	16.0	5-20	9	450
<i>Two Section Half Door</i>															
T-49DT-4	4	23	23	6	54	29 1/2	78 1/4	1/3	1/2	115/60/1	1	16.0	5-20	9	480

* Height does not include 5" for castors or 6" for optional legs.

Specifications subject to change without notice.

Standard Features

- Environmentally friendly refrigerants (refrigerator 134A; freezer R404A).
- Two, independent, self-contained, oversized and balanced, environmentally friendly refrigeration systems - (refrigerator holds 33°F to 38°F; freezer holds -10°F).
- T-23DT features the refrigerator on top and the freezer on bottom.
- T-49DT & T-49DT-4 features the refrigerator on the left and the freezer on the right. Freezer section includes backguard for improved airflow.
- 300 series stainless steel doors & front.
- Anodized quality aluminum top, sides and back.
- Interior - NSF approved, white vinyl coated aluminum sides and top, 300 series stainless steel floor with coved corners.
- Recessed handles (lifetime guaranteed).
- Dual, exterior mounted, digital temperature monitor.
- Door locks standard.
- Magnetic door gaskets.
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Compartmentalized, Incandescent interior lighting.
- 4" diameter swivel castors standard equipment - locking castors provided for front set.
- Slide out compressors can be serviced easily and accessed by a single repairman.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.

Optional Accessories

- Available with 6" stainless steel or optional seismic legs.
- Additional shelves available.
- Novelty baskets available.

Model	Front	Right	Plan	3D
T-23DT	TFEY55E	TFGY075	TFEY03P	TFEY553
T-49DT	TFEY56E	TFEY02S	TFE002P	TFEY563
T-49DT-4	TFEY66E	TFGY02S	TFE002P	TFEY663

Clearance Required For Coolers (USA)		
Sides Inches/mm	Top Inches/mm	Rear Inches/mm
0 / 0	0 / 0	3 / 77



TRUE FOOD SERVICE EQUIPMENT

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366 • (636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truefmfg.com

Printed in U.S.A.