



Project:

Item Number:

Quantity:

CAYENNE® HOT DOG ROLLER GRILLS



Cayenne® Hot Dog Roller Grill

DESCRIPTION

The Vollrath Cayenne® Hot Dog Roller Grills are noted for their exceptional reliability and attractive compact design. They are ideal for use in convenience stores, take out restaurant and for mobile caterers.

MODELS

40820 HDR5005 5 Roller Grill, 12 Hot Dog Capacity

40821 HDR5007 7 Roller Grill, 18 Hot Dog Capacity

40822 HDR5009 9 Roller Grill, 24 Hot Dog Capacity

FEATURES

- Body and rollers are all stainless steel construction for durability and easy cleaning
- Excellent point-of-sale merchandisers for hot dogs, taquitos, brats and more
- 360 degree roller rotation provides even heating and effective merchandising
- Removable drip pan for easy cleaning
- 40820 features compact design for applications where space is an issue
- 40821 and 40822 feature front and rear variable temperature controls for use with different menu items
- Breath guards available, sold separately
- 4 ft. (1.2 m) cord with plug

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Agency Listings



Due to continued product improvement, please consult www.vollrathco.com for current product specifications.

Approvals	Date



www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573


Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

CAYENNE® HOT DOG ROLLER GRILLS


MODELS 40820 HDR5005 5 Roller Grill, 12 Hot Dog Capacity
 40821 HDR5007 7 Roller Grill, 18 Hot Dog Capacity
 40822 HDR5009 9 Roller Grill, 24 Hot Dog Capacity

DIMENSIONS

Dimensions shown in inches (cm).

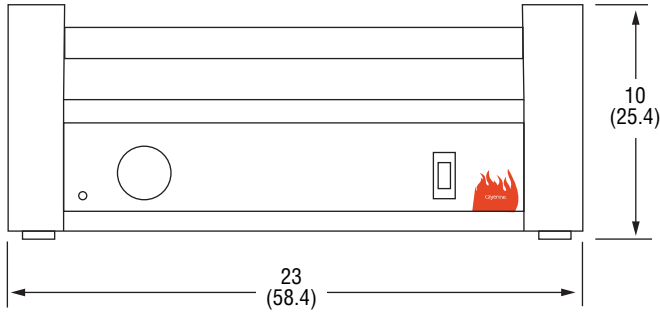

Front View

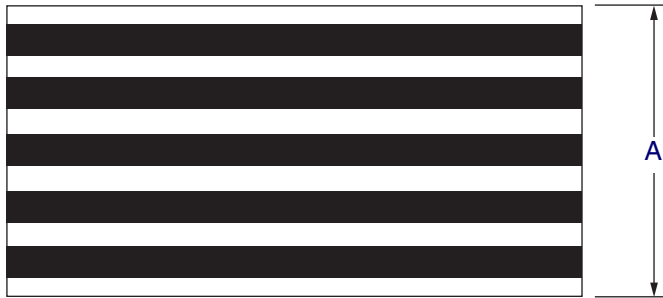

Top View

SPECIFICATIONS

Item	(A) Depth	Watts	Volts	Amps	Ship Weight lb (kg)	Plug
40820	10 (25.4)	400	120	3.3	27 (12.2)	5-15P
40821	13 (33)	560	120	4.7	33 (15)	5-15P
40822	16 (40.6)	720	120	6.0	39 (17.7)	5-15P

Receptacle

