



Exacting Standards, Just Like yours, since 1948

Project _____

Item Number _____

Quantity _____

4612



4612 Economy Slicer

Models:

- 4612:** 1/4HP Manual Slicer



CERTIFIED BY NSF INTERNATIONAL TO MEET AND EXCEED THE NSF/ANSI 2010 STANDARDS

12" Precision slicing German hollow ground blade
Unique smooth curve transitions to redirect liquids away from controls and operator
Easily detachable carriage for easy cleaning

Features:

- Medium duty, intermediate volume slicer
- 12" Precision slicing German hollow ground blade
- Unique drip tray fence redirects liquids away from controls and operator towards distinctive concave base casting for easy cleaning
- Ergonomic comfort design operation
- Powerful 1/4 hp motor standard
- Adjustable slice thickness from 0 to 1/2"
- Capable of slicing a small amounts cheese
- Easily removable sharpener for cleaning
- Quick and simple disassembly of carriage and feed grip for easy and thorough cleaning
- Sanitary polished and anodized aluminum construction

- Carriage easily detaches for ease of washing and sanitizing.
- Permanently mounted protective edge guard for operator safety
- Max duty 2 hours a day

Optional Accessories:

- Stainless steel blade
- Heavy duty clear plastic cover
- Stainless steel vegetable chute
- Sturdy stainless steel stand

Warranty:

- One year, carry-in parts and labor

Economy Series Slicer

Univex Corporation

Warranty Details

The 4612 slicer carries a one year, carry-in parts and labor warranty against any flaws in materials and workmanship. This period begins on the date of the purchase and, provided the unit is used in accordance with our instructions, is in full effect for one year from that date. Any work performed under this warranty must be performed between the hours of 8am and 5pm Monday through Friday. Univex will not pay for overtime charges for work performed other than during normal business hours. Damage incurred in transit or from installation error, accident, alteration or misuse is not covered. Univex shall not be liable for any consequential compensatory, incidental, or special damages. Contact the Univex service department for any warranty claims.



Univex Corporation
www.Univexcorp.com

3 Old Rockingham Rd
Salem, NH 03079
United States of America


TEL: 800.258.6358
INTL TEL: 603.893.6191
FAX: 800.356.5614
INTL FAX: 603.893.1249



Exacting Standards, Just Like yours, since 1948

Value Series Slicer

4612

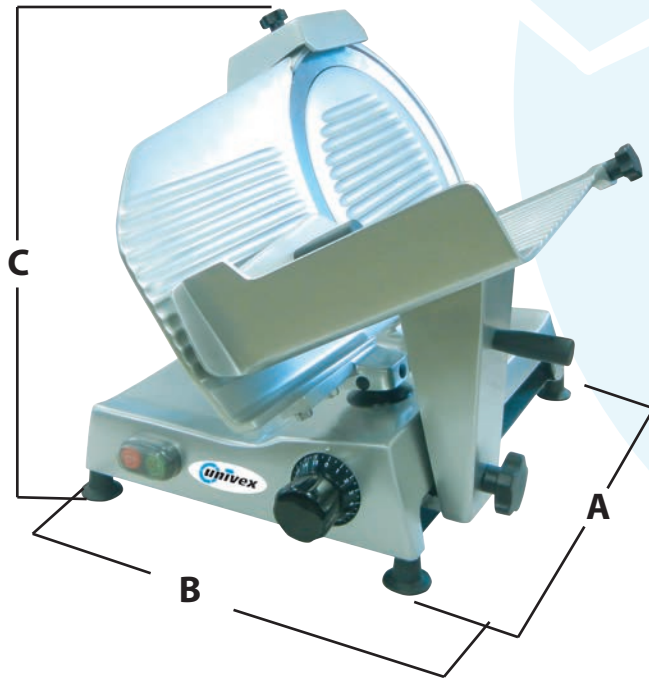

A: Width
23.75" (60.33cm)

B: Depth
18.25" (46.35cm)

C: Height
16" (40.64cm)

Electrical: 115V / 60Hz / 1Ph, 1680 RPM, 1/4 HP (.19kW), 1.9amp
208-240V / 50-60Hz / 1Ph, 1680 RPM, 1/4 HP (.19kW), 1amp

Controls: Manual slice thickness knob, push button on/off, attached blade sharpener

Drive Assembly: Belt driven

Blade diameter: 12" (38.48cm) razor sharp blade

Blade RPM: 420 RPM

Slice thickness: .5" (1.27mm) maximum slice thickness

Max product size: Rectangular: 8" x 5" (20.3cm x 13.3cm)
Square: 5" x 5" (13.3cm x 13.3cm)
Round: 7" (20.3cm)

Construction: Anodized, cast aluminum body for durability and stunning looks

Carriage stroke: 9.25" (23.5cm)

Shipping Information:

Freight Class: 85
Net Weight: 44.6LBS (20.2Kg)
Shipping Weight: 53LBS (24Kg)

Shipping Box Dimensions:

Height: 20.5" (520mm)
Width: 27.2" (690mm)
Depth: 22.8" (580mm)



Univex Corporation
www.Univexcorp.com

3 Old Rockingham Rd
Salem, NH 03079
United States of America

TEL: 800.258.6358
INTL TEL: 603.893.6191
FAX: 800.356.5614
INTL FAX: 603.893.1249